


# **Mono Point Exit Fixed Stem Suspension Assembly Instructions**



Insert Tail End then shift tapped side on  
inside of crossbar and fasten with 8/32" screw

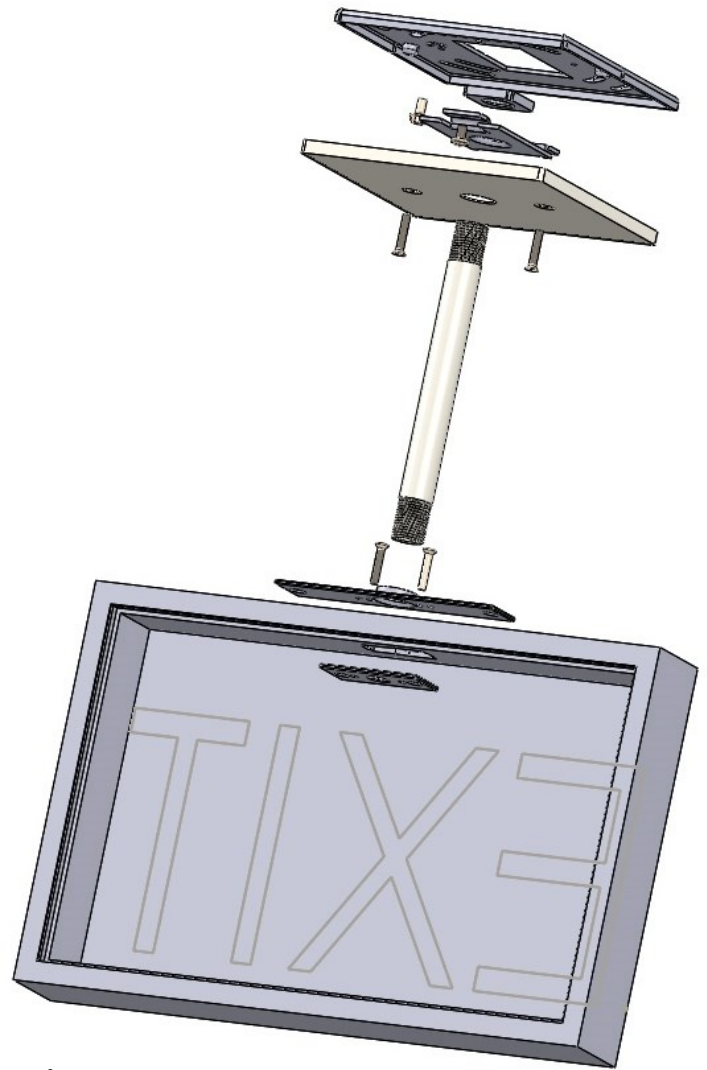

## **Warning Electrical Shock Hazard**

**All wiring should be done by a qualified electrical professional**

**Disconnect all power sources before attempting to Install**

- 1) Mount Mono Point Crossbar as shown to 4" octagonal or 4" square box.
- 2) Assemble exit bracket and base into exit sign and mount stem into exit bracket and pull wiring conductors out 6" longer than stem. Make electrical and grounding connections inside exit sign.
- 3) Insert canopy over stem.
- 4) Thread MP-Plate onto stem and use locknut on inside to lock into place.
- 5) Make electrical connections and grounding while holding up fixture.
- 6) Hinge MP-Plate as shown above on inside of MP Crossbar sliding all the way in then slide tapped screw hole on inside of crossbar on opposite end. Fasten in place with 8/32" Screw.
- 7) Push canopy to junction box and fasten to crossbar using 2-6/32" Screws

**Assembly is rated for 50 Lbs. Static Loads Only (No dynamic or moving loads)**

**Not for chemical or pool corrosive environments**

**Mono Point Patent Pending Pendant Systems Mfg. 5/2013**