

Pendant Systems

The Lighting Suspension Specialists www.PendantSystems.com P-215-638-8552 F-215-638-8554

Strain Relief Products



#213 & #252
Metal Strain Relief for Round

#213- 18/3 & 18/4 SJT
Cord .300"-.343" Diameter Cables

#252- Round SJT
Cord .375"-.420" Diameter



#131
1/2 " IP Threaded Female Bushing
with center .4" Cord Hole
.474"L x 1"W x .39"
1/2 IP Thread



#153- 1/4" Diameter Nylon Cable Strap
W/ .206" Screw Hole Natural Heyco #3324

#234- 1/8" Diameter Nylon Cable Strap
W/ .210" Screw Hole Natural Heyco #3302



#237
.875" Hole Bushing Black Heyco
Part# 2850N
.945"W x .750"ID x .250"H x .063"
Max Panel Thickness



#111 & 111BK
4" Cable Ties
For Securing Power Cord
to Aircraft Cable



#154
Black Split Snap Bushing for .500" Hole
#288
Plastic Black .625" Hole Split Insulated Hole
Bushings .450" ID Heyco # 2872



#247- White Snap Bushing for .375" Hole
#152- White Snap in Bushing for .500" Hole
#216- White Snap in Bushing for .625" Hole
#229- White Snap in Bushing for .875" Hole



#151
1/4"-Hole Plugs .315"H
Used to plug large side of
keyhole for Cross Cables
with Half Ball end fittings



#169
7/32"-Hole Plugs .25"H
Used to plug large side of
keyhole for Crosscables
with Half Ball end fittings



#299- White Snap Bushing for .875" Hole
#299 BK- Black Snap in Bushing for .875" Hole
.290"-.385" Cords



#288
Split Bushing for
.625" Hole



#290 & 290 BK
Universal Bushing for .875"
Hole
Heyco 2129 Plastic
White .875" Hole Universal
Insulated Hole Bushing .560"



#292
Blank Hole
Bushings for .875"
Hole



#300- White Snap Bushing for .625" Hole
#300 BK- Black Snap in Bushing for .625" Hole
.130"-.210" Cords



Pendant Systems

The Lighting Suspension Specialists www.PendantSystems.com P-215-638-8552 F-215-638-8554

Strain Relief Products



CG Cap WHT-(Matte White Cap)
CG Cap BN- (Brushed Nickel Cap)
CG Cap BK- (Matte Black Cap)
CG Cap NK-(Nickel)

Cord Grip Cap 1/8"IP Female W/ CG Plastic Base for
 .190"-260" Diameter Round Cord
 Intertek certified to UL #635 standard



CG Check Ring WHT-(Matte White)
CG Check Ring BN- (Brushed Nickel)
CG Check Ring BK- (Matte Black)
CG Check Ring NK-(Nickel)

Check ring for CG Base part of CG CAP (Part shown on Left)
 when mounting CG Base on surface of fixture



CG Coupler WHT-(Matte White)
CG Coupler BN- (Brushed Nickel)
CG Coupler BK- (Matte Black)
CG Coupler NK-(Nickel)


Coupler for Cord Grip, 1/8"IP Female
 Dimensions are .7"W X .675"H



255 BK
 Lock-It Style Strain Relief for
 1.109" PF Hole
 Fits .600"-.700" Cord



171 WHT/BK
 7/8"(.875") KO Strain Relief for
 18/3, 18/4 & 18/5 SJT Cord
 Connector Snaps and Locks
 around Cord
 Fits .290"-.385" cord

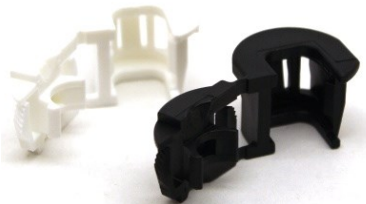


126 WHT/BK
 Lock-It Style Strain Relief for .875" PF Hole
 for 12/3, 14/3, 14/4 & 18/5
 .380"-.450" cord



102BK 102
 Lock-It Style Strain Relief for .625"
 PF Hole for 18/3 & 18/4
 Fits .300"-.330" Cord
 Locks around cord before insertion



248BK 248
 Lock-It Style Strain Relief for .625" PF
 Hole
 Fits .220"-.290" for SVT cord
 Locks around cord before insertion

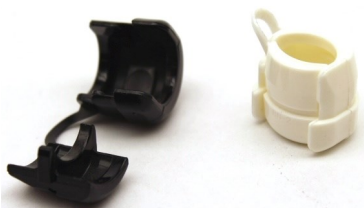

260BK 260
 Compression Style Strain Relief
 for .875" PF Hole for 14/3,14/4,
 14/5, 12/3, & 12/4
 Fits .530" - .600" Cord



Cord Grip 1/2" IP Bk/Wht/GY
 Strain Relief for .170" - .450" DIA Cord
 (AMW, SJT, SVT) x 1/2" IP Male
 1.72" L x 1.050" Across Flats x 1.144"
 1/2" Thread



Cord Grip Bk/Wht/GY
 Strain Relief for .105"-.315" DIA
 Cord
 18/3 SJT Cord x 3/8"IP Male
 1.56"L x .746"Across Flats x .575"
 3/8" Thread

Pendant Systems

The Lighting Suspension Specialists www.PendantSystems.com P-215-638-8552 F-215-638-8554

Strain Relief



Micro CG Cap WHT-(Matte White Cap)
Micro CG Cap BN- (Brushed Nickel Cap)
Micro CG Cap BK- (Matte Black Cap)
Micro CG Cap NK-(Nickel)
Micro CG Cap GY-(Gray)

Cord Grip Cap 1/8"IP Female W/ 1/8"IPS CG Plastic Base For .125"-180" Diameter Round Cord Intertek certified to UL #635 standard



CG Cap WHT-(Matte White Cap)
CG Cap BN- (Brushed Nickel Cap)
CG Cap BK- (Matte Black Cap)
CG Cap NK-(Nickel)
CG Cap GY-(Gray)

Cord Grip Cap 1/8"IP Female W/ 1/8"IPS Male CG Plastic Base
 For .190"-260" Diameter Round Cord Intertek certified to UL #635 standard

CG CAP NT
 Unassembled

CG Cap NT WHT-(No Thread)
CG Cap NT BN-(No Thread)
CG Cap NT BK-(No Thread)
CG Cap NT NK-(No Thread)

No Thread (NT) Base with Flange



CG Coupler WHT-(Matte White)
CG Coupler BN- (Brushed Nickel)
CG Coupler BK- (Matte Black)
CG Coupler NK-(Nickel)

Coupler for Cord Grip, 1/8"IP Female
 Dimensions are .7"W X .675"H

CG Check Ring WHT-(Matte White)
CG Check Ring BN- (Brushed Nickel)
CG Check Ring BK- (Matte Black)
CG Check Ring NK-(Nickel)

Check ring for CG Base part of CG CAP (Part shown on Left)
 when mounting CG Base on surface of fixture



CG CAP WHT SJT -(Matte White Cap)
CG Cap BN SJT - (Brushed Nickel Cap)
CG Cap BK SJT - (Matte Black Cap)
CG Cap NK SJT -(Nickel)
CG Cap GY SJT -(Gray)

Cord Grip Cap SJT W/ 3/8"IPS CG Plastic Base For .300"-385" Diameter Round Cord Intertek certified to UL #635 standard