


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	Exit Base	Exit Bracket Base 6/32" Slip & Tapped Holes. 2" x .875" Zinc Plated	1
2	Exit Bracket 3-8 IP	Exit Bracket with 3/8" IP tapped center hole & 6/32" tapped holes. 4.5" x .875" (Available in white, nickel and black)	1
3	Exit Bracket Screws	6/32" Screws	2

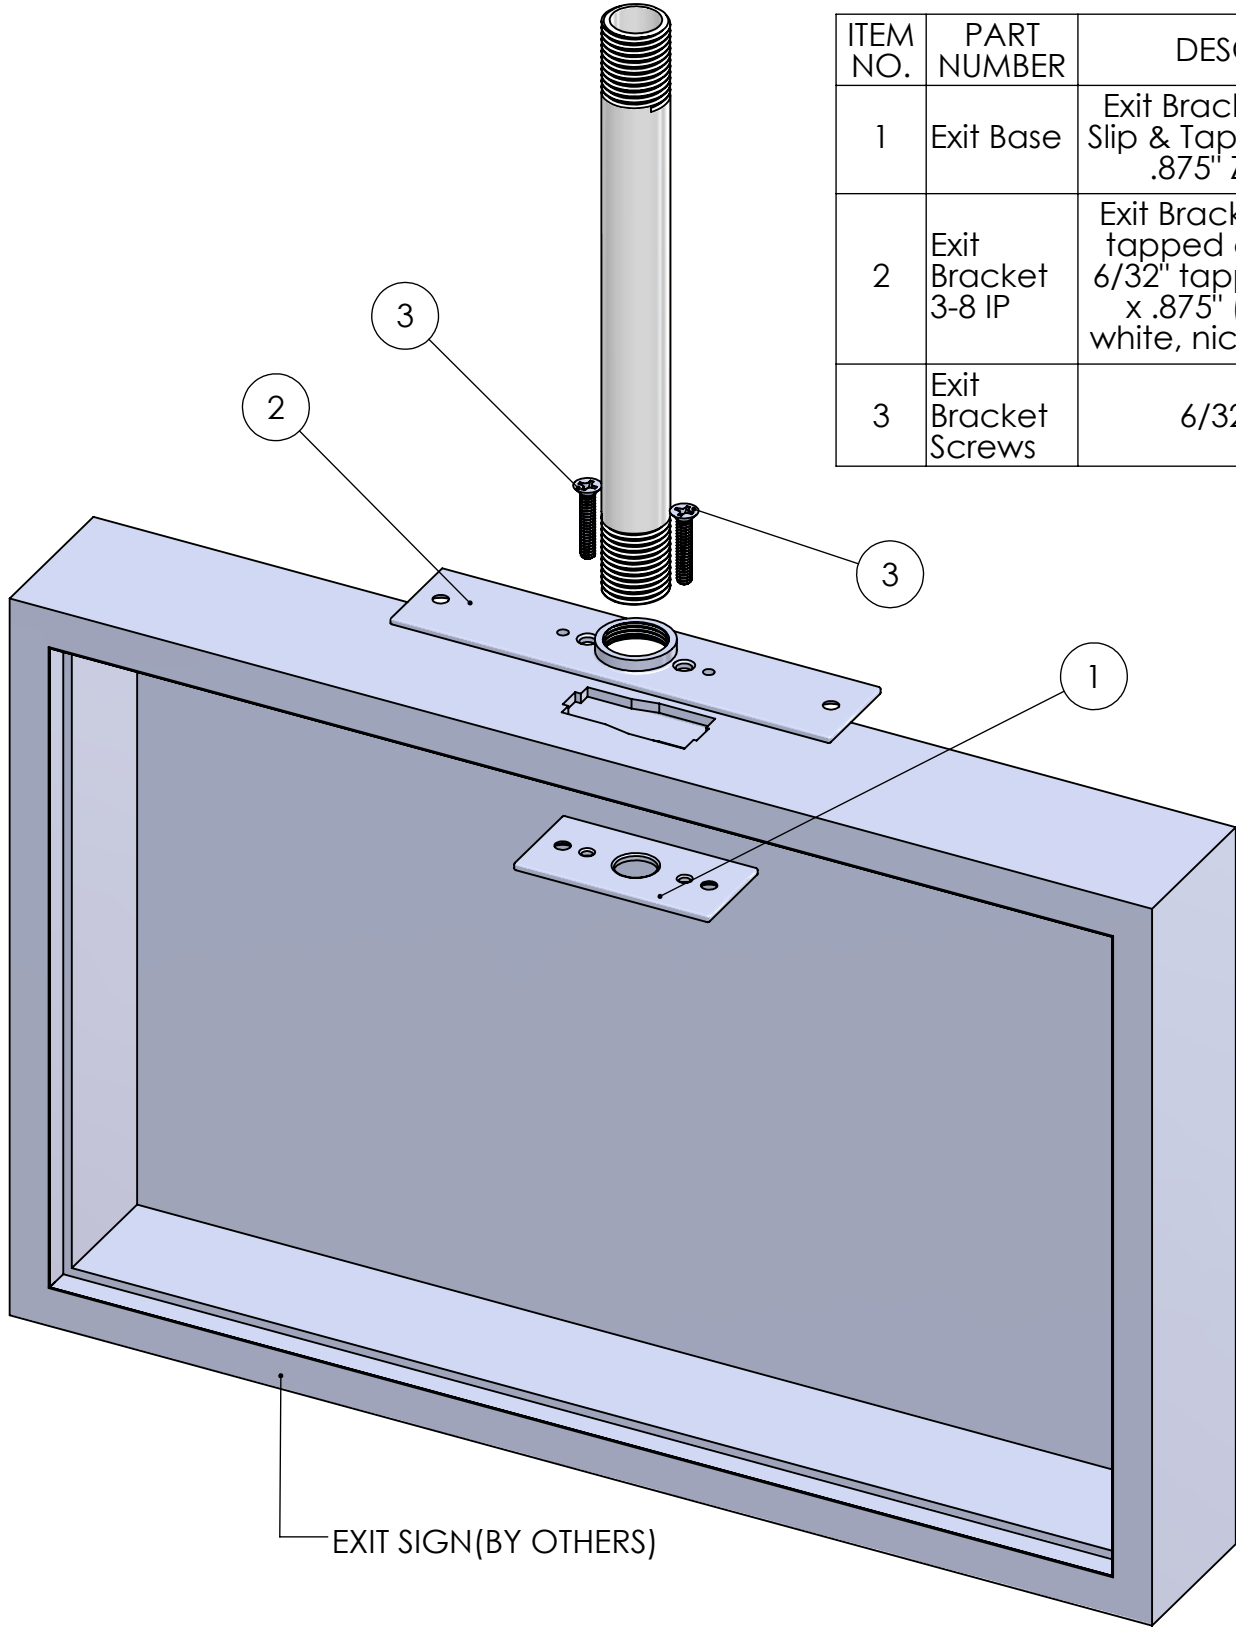

STEM LENGTH WILL VARY. ORDER SEPARATELY
Exit BRKT Kit 3/8 USED WITH STEM 3/8" IP
3/8" IPS .625"-.635" O.D. 18 T.P.I.
Add Suffix WT for White, BK for Black, or NK for Nickel

This Document Contains Proprietary Data that is property of Pendant Systems which reserves all rights to it. Unauthorized use without authorization is prohibited.

Pendant Systems

1670 Winchester Rd.
 Bensalem, PA 19020
 P-215-638-8552
 F-215-638-8554
 www.PendantSystems.com

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN BOTH INCHES & MILLIMETERS UNLESS OTHERWISE NOTED TOLERANCES:

LINEAR: XX= .02" XXX= \pm .010" ANGULAR: \pm 1 Degree

FINISH:

TITLE:

Exit BRKT Kit 3-8

DO NOT SCALE DRAWING

MATERIAL:

Part #

DEBUR AND BREAK SHARP EDGES

REVISION

DRAWN DATE: 7/12/16

Drawn By: MWR

SCALE: NTS

SHEET 1 OF 1